

Pi 70

DOP 41


Pi 70 AL

DOP 42

MW - EN 14303

**RI
SE**Research Institutes
of Sweden**TERMOLAN**

ISOLAMENTOS TERMO-ACÚSTICOS, S.A.

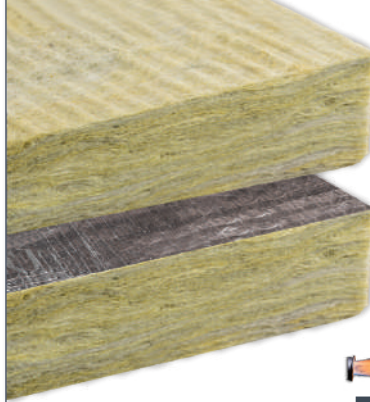

Protection against fire



Thermal insulation



Acoustical insulation

DEFINITION:

Rigid slabs of uniform thickness made of stone wool fibres bonded with synthetic binder, without facing - Pi 70 - or aluminium faced - Pi 70 AL .

APPLICATIONS:

Multiple as thermal acoustical insulation in industrial applications. Suitable at both high and low service temperature, in boilers, ducting, ovens, vessels and other industrial equipment.

BENEFITS:

- Easy and quick application;
- High insulation performances;
- Very good mechanical performance;
- Fire safety;
- Chemically neutral and non corrosive;
- Excellent water behaviour;
- Inert product respecting the environment (CFC and HCFC free).

PRESENTATION:

Slabs. Options of presentation:

THICKNESS (mm) [NP EN 823]	DIMENSIONS (mm) [NP EN 822]
30 to 100	1000×600

Tolerances:

THICKNESS (CLASS T4): -3 % OR -3 mm ^{a)} TO +5 % OR +5 mm ^{b)}

LENGTH: ±2%


WIDTH: ±1.5%

^{a)} Is valid the greatest numerical tolerance

^{b)} Is valid the lowest numerical tolerance

PACKAGING:

Packages packed in retractile plastic.
Geometry (A×B×H):

**PHYSICAL PROPERTIES OF MATERIALS****NOMINAL DENSITY**

EN 1602
ASTM C167

70 kg/m³**MAXIMUM SERVICE TEMPERATURE**

EN 14706
ASTM C447

ST(+) = 400 °C

NOTE: The service temperature of the aluminum facing must not exceed 90 ° C.

SPECIFIC HEAT FACTOR**c = 0.84 kJ/kg.°C****MAXIMUM BENDING RADIUS**

THICKNESS (mm)	30	40	50	60	70	80	100
RADIUS (mm)	400	500	700	1000	1200	1500	2100

THERMAL CONDUCTIVITY, λ

EN 12667
ASTM C335

MEAN TEMPERATURE(°C)	10	50	100	150	200	250	300	350	400
λ (W/m.K)	0.033	0.039	0.046	0.055	0.066	0.078	0.093	0.109	0.128
λ (kcal/h.m.K)	0.028	0.034	0.040	0.047	0.057	0.067	0.080	0.094	0.110

FIRE REACTION

EN 13501-1
ASTM E84

Incombustible - EUROCLASS A1**TERMOLAN**

www.termolan.pt/en | www.rocterm.com | termolan@termolan.pt




PHYSICAL PROPERTIES OF MATERIALS

ACOUSTICAL ABSORPTION COEFFICIENT, α_s

EN ISO 354

THICKNESS 50 mm	F (Hz)	100	125	160	200	250	315	400	500	630
	α_s	0.08	0.15	0.29	0.55	0.67	0.85	0.99	1.08	1.13
	F (Hz)	800	1000	1250	1600	2000	2500	3150	4000	5000
	α_s	1.20	1.18	1.10	1.16	1.03	1.06	1.02	1.02	0.96

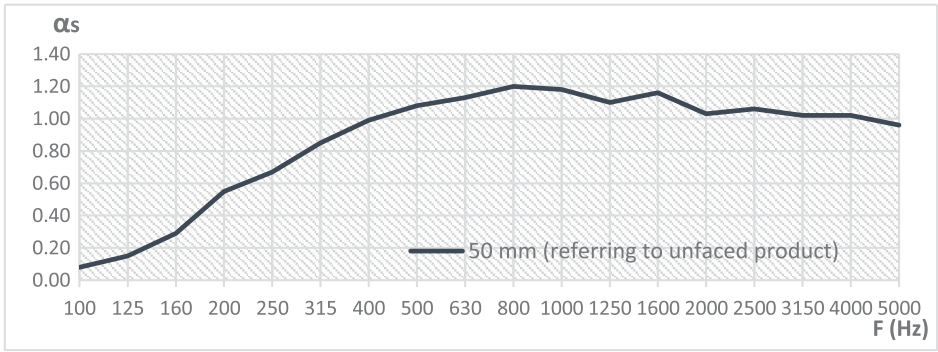

EQUIVALENT ABSORPTION COEFFICIENT, α_w

EN ISO 11654

$\alpha_w = 1.00$ CLASS A

OTHER PROPERTIES

SQUARENESS [NP EN 824]	Deviation length / width < 5mm/m
FLATNESS [NP EN 825]	Deviation ≤ 6 mm
DIMENSIONAL STABILITY, $\Delta\epsilon$ [NP EN 1604]	23 °C / 90% HR: the relative deviation (length and width) does not exceed 0.0%
WATER ABSORPTION [NP EN 1609]	WS ≤ 1.00 kg/m ²
WATER VAPOUR PERMEABILITY [EN ISO 12572]	0.05 g/m ² /24h (value depending of the aluminium facing)
WATER VAPOUR DIFFUSION FACTOR [EN 14303]	$\mu = 1.00$
AIR FLOW RESISTIVITY [EN 29053]	AF > 20 kPa.s/m ² (referring to unfaced product)

