

PN 40

DOP 9

MW - EN 13162 - T3 - WS



TERMOLAN
ISOLAMENTOS TERMO-ACÚSTICOS, S.A.

DEFINITION:

Semi rigid slabs (40 kg/m³) of uniform thickness made of stone wool fibres bonded with synthetic binder, without facing.

APPLICATIONS:

Multiple applications in various constructive solutions, as thermal and acoustic insulation.

BENEFITS:

- Easy and quick application;
- Easy adaptation to structural elements;
- Good mechanical performance;
- Very good insulation performances;
- Fire safety;
- Good water behaviour;
- Inert product respecting the environment (CFC and HCFC free).

PRESENTATION:

Slabs packed in packages. Options:

THICKNESS (mm) [NP EN 823]	DIMENSIONS (mm) [NP EN 822]
30 to 100	1350×600

Tolerances:

THICKNESS (CLASS T3): -3 % OR -3 mm ^{a)} TO +10 % OR +10 mm ^{b)}

LENGTH: ±2 %

WIDTH: ±1.5 %


^{a)} Is valid the greatest numerical tolerance

^{b)} Is valid the lowest numerical tolerance

PACKAGING:

Packages packed in retractile plastic.

Geometry (A×B×H):



Protection against fire



Thermal insulation



Acoustical insulation

PHYSICAL PROPERTIES OF MATERIALS

THERMAL RESISTANCE, R_D

EN 12667
EN 12939

THICKNESS (mm)	30	40	50	60	80	100
R_D (m ² .K/W)	0.85	1.10	1.40	1.70	2.25	2.85

THERMAL CONDUCTIVITY, λ_D

EN 12667
EN 12939

Declared value: $\lambda_D = 0.035$ W/m.K

FIRE REACTION

EN 13501-1
ISO 1182

Incombustible - **EUROCLASS A1**

WATER ABSORPTION

NP EN 1609

$WS \leq 1.00$ kg/m²

WATER VAPOUR DIFFUSION FACTOR


EN 12086

$\mu = 1$

ACOUSTICAL ABSORPTION COEFFICIENT, α_s

EN ISO 354

THICKNESS 50 mm	F (Hz)	100	125	160	200	250	315	400	500	630
	α_s	0.05	0.27	0.53	0.41	0.75	0.73	0.90	1.13	0.99
	F (Hz)	800	1000	1250	1600	2000	2500	3150	4000	5000
	α_s	1.25	1.27	1.11	1.34	1.02	1.04	0.99	0.92	0.78

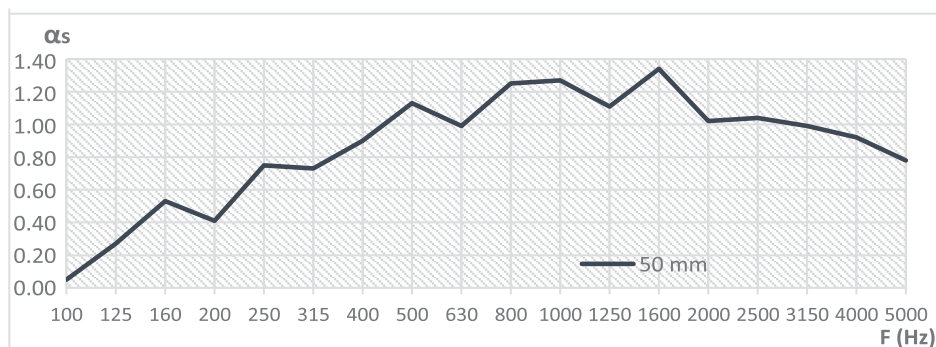

EQUIVALENT ABSORPTION COEFFICIENT, α_w

EN ISO 11654

$\alpha_w = 0.95$ CLASS A

OTHER PROPERTIES

SQUARENESS [NP EN 824]	Deviation length / width < 5mm/m
FLATNESS [NP EN 825]	Deviation ≤ 6 mm
DIMENSIONAL STABILITY, $\Delta\epsilon$ [NP EN 1604]	23 °C / 90% HR: the relative deviation (length and width) doesn't exceed 0.1%
AIR FLOW RESISTIVITY, A_{Fr} [EN 29053]	> 10 kPa.s/m ²

