

PN 70

DOP 12

MW - EN 13162 - T4 - WS



TERMOLAN
ISOLAMENTOS TERMO-ACÚSTICOS, S.A.

DEFINITION:

Rigid slabs (70 kg/m³) of uniform thickness made of stone wool fibres bonded with synthetic binder, without facing.

APPLICATIONS:

Multiple applications for solutions of higher demands requirements as thermal and acoustical insulation.

BENEFITS:

- Easy and quick application;
- Easy adaptation to structural elements;
- Excellent thermal insulation and acoustic insulation;
- Very good mechanical performance;
- Fire safety;
- Excellent water behaviour;
- Inert product respecting the environment (CFC and HCFC free).

PRESENTATION:

Slabs packed in packages. Options of presentation:

THICKNESS (mm) [NP EN 823]	DIMENSIONS (mm) [NP EN 822]
30 to 100	1350×600

Tolerances:

THICKNESS (CLASS T4): -3 % OR -3 mm ^{a)} TO +5 % OR +5 mm ^{b)}

LENGTH: ±2 %

WIDTH: ±1.5 %



^{a)} Is valid the greatest numerical tolerance

^{b)} Is valid the lowest numerical tolerance

PACKAGING:

Packages packed in retractile plastic.

Geometry (A×B×H):

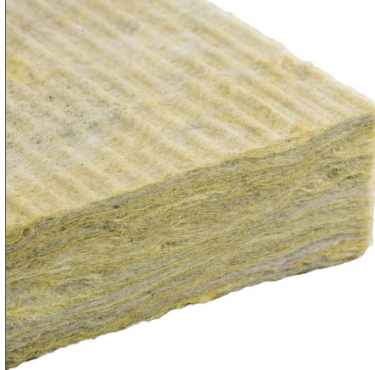

Protection against fire



Thermal insulation



Acoustical insulation

PROPRIEDADES FÍSICAS DOS MATERIAIS

THERMAL RESISTANCE, R_D

EN 12667
EN 12939

THICKNESS (mm)	30	40	50	60	80	100
R_D (m ² .K/W)	0.90	1.20	1.50	1.80	2.40	3.00

THERMAL CONDUCTIVITY, λ_D

EN 12667
EN 12939

Declared value: $\lambda_D = 0.033$ W/m.K

FIRE REACTION

EN 13501-1
ISO 1182

Incombustible - **EUROCLASS A1**

WATER ABSORPTION

NP EN 1609

$WS \leq 1.00$ kg/m²

WATER VAPOUR DIFFUSION FACTOR


EN 12086

$\mu = 1$

ACOUSTICAL ABSORPTION COEFFICIENT, α_s

EN ISO 354

THICKNESS 50 mm	F (Hz)	100	125	160	200	250	315	400	500	630
	α_s	0.08	0.15	0.29	0.55	0.67	0.85	0.99	1.08	1.13
	F (Hz)	800	1000	1250	1600	2000	2500	3150	4000	5000
	α_s	1.20	1.18	1.10	1.16	1.03	1.06	1.02	1.02	0.96

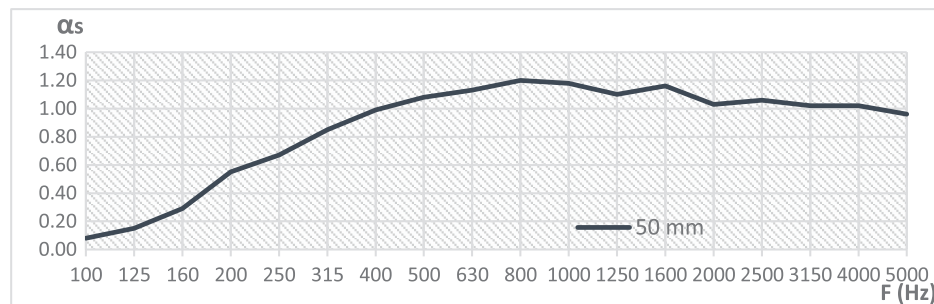

EQUIVALENT ABSORPTION COEFFICIENT, α_w

EN ISO 11654

$\alpha_w = 1.00$ CLASS A

OTHER PROPERTIES

SQUARENESS [NP EN 824]

Deviation length / width < 5mm/m

FLATNESS [NP EN 825]

Deviation ≤ 6 mm

DIMENSIONAL STABILITY, $\Delta\epsilon$ [NP EN 1604]

23 °C / 90% HR: the relative deviation (length and width) doesn't exceed 0.1%

AIR FLOW RESISTIVITY, AFR [EN 29053]

> 20 kPa.s/m²

